



★★★★ 92/42/CEE / IP X4D

CONDENSAZIONE ACCUMULO

CONDENSING STORAGE

DUAL-TECH - 24 / 28 / 34 KW



DUAL-TECH: TUTTO
IL COMFORT CHE TI SERVE
DUAL-TECH: ALL THE
WELL BEING YOU NEED

- Caldaie a condensazione ad ACCUMULO nelle potenze di 24, 28 e 34 kW con il nuovo brevetto DUAL-TECH®
- Dotate di scambiatore primario IN ACCIAIO INOX Ø 28 mm con spira monotubo autopulente 100% made in Radiant
- Scheda elettronica DIGITECH CS
- Dimensioni ridotte e facilità di accesso per una semplice manutenzione
- Massima silenziosità 52 db



silenziosità < 52 dB
enhanced noiseless 52 dB



Ø 28 mm

- Condensing wall hung storage boiler with new dual-tech system equipped with storage tanks 8 and 20 l. capacity available as 24, 28 and 34 kW
- Units equipped with an INOX exchanger Ø 28 mm 100% made in Radiant
- Digitech CS main P.C.B.
- Compact size for easier maintenance
- Enhanced noiseless 52 db

DUAL-TECH



Disponibili anche le versioni
ALL INCLUSIVE SYSTEM
per impianti multi zona
ad alta/bassa temperatura.


Available with 2 circuits
system for high/low
temperature, with two
pumps and mixing valve.

ALL INCLUSIVE
SYSTEM


DUAL-TECH® è l'evoluzione tecnologica del precedente brevetto Radiant DUOPASS®. DUAL-TECH® nasce dalla unione dello scambiatore "made in Radiant" COMBI-TECH® ed il sistema brevettato Radiant DUOPASS®. Il sistema DUAL-TECH® è composto da uno scambiatore doppio serpentino integrato, 100% made in Radiant, che permette uno scambio di calore istantaneo senza dispersioni per cui ad alta efficienza, sostituendo il precedente sistema che si avvaleva di uno scambiatore secondario.

DUAL-TECH® is the step forward, as for the technology, of the previously patented Radiant DUOPASS®. DUAL-TECH® is the ideal combination between the exchanger "made in Radiant" COMBI-TECH® and the patented assembly Radiant DUOPASS®. The DUAL-TECH® assembly is made of an integrated double-coil exchanger, fully made in Radiant, that enables an instantaneous highly efficient heat transfer without losses, that replaces the previous system that featured a secondary exchanger.

FUNZIONAMENTO IN RISCALDAMENTO HEATING MODE

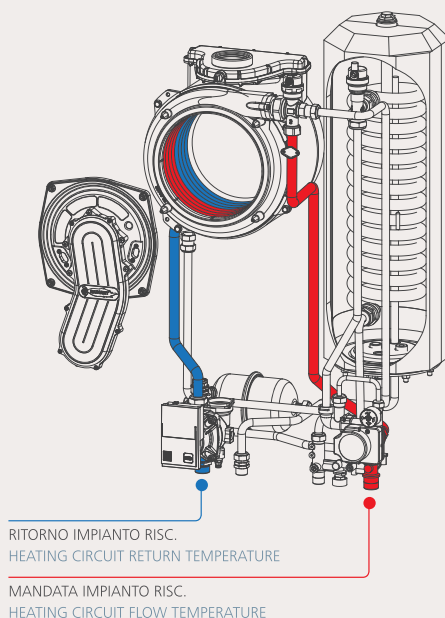

FUNZIONAMENTO IN SANITARIO D.H.W. MODE

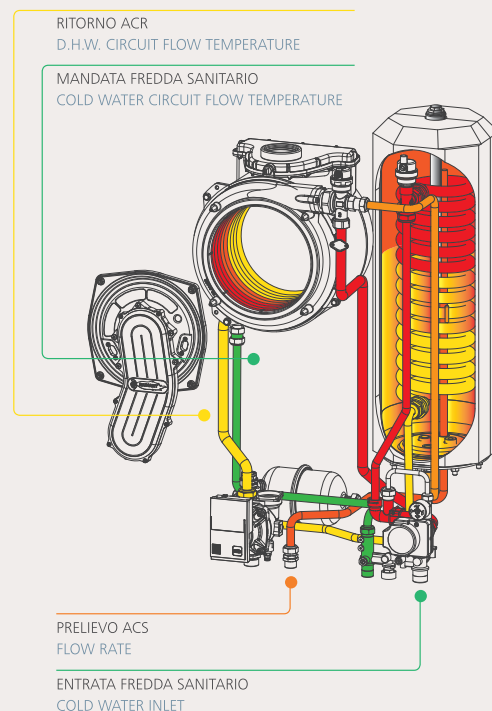

MODELLO Model	POTENZA Heating output	CLASSE ENERGETICA Energy class	MODULAZIONE Modulation	PRELIEVO ACS Δt 30°C (l./10min.) Specific flow rate Δt 30°C (l./10min.)
R2KA 24 /8	24 kW	V	1:9	122,5
R2KA 24 /20	24 kW	V	1:9	135
R2KA 28 /20	28 kW	V	1:9	152
R2KA 34 /20	34 kW	V	1:9	185

DUAL-TECH

ACCUMULO 8 LT

8 L. STORAGE TANK

R2KA 24 /8

DUAL-TECH

ACCUMULO 20 LT

20 L. STORAGE TANK

R2KA 24 /20

R2KA 28 /20

R2KA 34 /20

DUAL-TECH

ACCUMULO 20 LT 2V

20 L. STORAGE TANK WITH 2 CIRCUITS SYSTEM

R2KA 24 /20 2V

R2KA 28 /20 2V

R2KA 34 /20 2V

1 VIA / 2 VIE - ALTA E BASSA TEMP.

1 / 2 CIRCUITS SYSTEM - HIGH/LOW TEMP.